



# SW9600 Dry Graphite Lubricant

**DESCRIPTION:** A fast drying lubricant that forms a thin, black film imparting excellent anti-friction and antiseizure properties to surfaces. Provides even dispersion of graphite film. Effective over a broad temperature range -100°F to 850°F (-73°C to 454°C). Performs under extreme pressure. Does not contain oil or moisture based diluents. Inert to oils, water and alkalis. Minimizes dust and dirt pick-up.


**USE ON:** Use where a dry lubricant is essential and petroleum products must be avoided. Tracks, bearings, conveyor parts, flat springs, hinges, switches, couplings, die casting machines, oven parts, automotive and industrial gaskets, cables and open gears, thread lubricant (antiseize), all metal to metal friction, internal combustion engine components (assembly and break-in) and all pre-assembly operations where dust and dirt free lubrication is required.

<b>SPECS:</b>	Can Size: 20 oz.
	Net Weight: 14 oz.
	Shipping Weight: 9.102 lbs.
	Packaged: 6 cans per case
	UPC Number: 0 41911 09600 3

<b>PHYSICAL CHARACTERISTICS:</b>	Color: Gray
	Fragrance: Solvent
	Spray Pattern: 3" circle @ 6" distance
	Shelf Life: 1 Year +

<b>REGULATORY:</b>	Recyclable Packaging: Yes
	VOC Compliant CARB/OTC: Yes
	CPSC Flammability: Extremely flammable
	24 HR. MEDICAL EMERGENCY: 1-866-836-8855

- FEATURES:**
- HIGH TEMPERATURE
  - ELECTRICALLY CONDUCTIVE
  - EXTENDS LIFE OF:  
GEARS, CHAINS, THREADED CONNECTIONS,  
BEARINGS AND MORE!

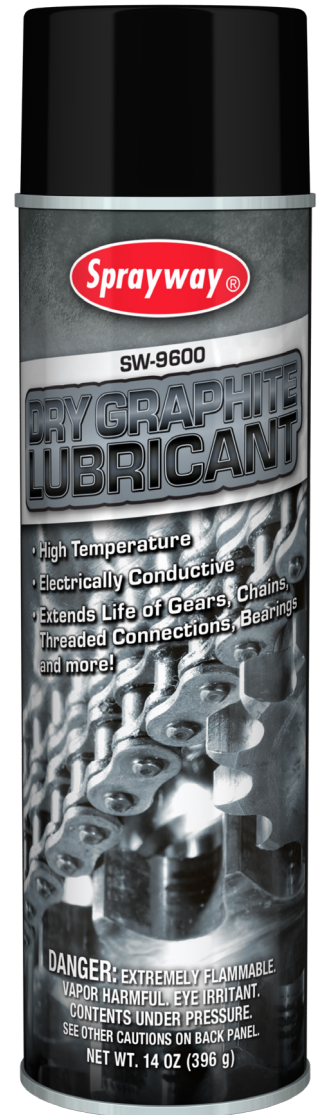

Manufactured by:  
**SPRAYWAY, INC.**

2651 Warrenville Rd. Ste 300 | Downers Grove, IL 60515  
800-332-9000 • Fax: 630-543-7797 • www.spraywayinc.com

REORDER/ITEM NUMBER SW-9600