

SW-397

HIGH FOAM ENGINE CLEANER


- CLINGS TO SURFACE
- PENETRATES AND EXPANDS INTO HARD TO REACH AREAS
- FAST ACTING FOAM TO REMOVE DIRT QUICKLY
- RINSE OFF WITH WATER

Cleans Dirt, Dust, and Road Grime. For Engines with Plastic Covers.
For use on Cars, Trucks, Power Mowers, RVs, ATVs Bikes, Farm Equipment, and Tractors.

DIRECTIONS: Do not start your engine after you have applied product. Rinsing is necessary to properly clean engine and prevent fire hazard. 1. Engine must be off and cool. 2. Care must be taken with all under the hood wiring and electronic sensors or components. Cover any open carburetor or intake system openings and electrical components. Uncovered, cracked, frayed wires or engine computer units can short circuit. 3. Shake well and apply generously to dry engine. Make sure to cover all dirty and grimy surface area with spray. Rinse overspray from body surfaces to avoid possibility of de-waxing or streaking. Engine cleaners may cause spotting to chrome or damage to custom paint or graphics. 4. Allow to soak for 10 to 15 minutes. Brush unusually heavy deposits to break up dirt. 5. Rinse all areas with a fine stream of water from top down. Minimize rinse water in areas that can cause performance problems. 6. When finished replace coverings and any removed parts. Start engine and idle for 15 minutes to ensure complete dry. *See product label for complete instructions.*

- Can Size: 20 oz.
- Shipping Weight: 16 lbs.
- UPC Number: 0 41911 00397 1
- Fragrance: Solvent
- Shelf Life: 1 Year +
- Recyclable Packaging: Yes
- Flammability: Flammable
- 24 HOUR MEDICAL EMERGENCY: 1.866.836.8855

- Net Weight: 17 oz.
- Packaged: 12 cans per case
- Color: Colorless
- Spray Pattern: Foamy stream
- Ozone Depleting Compounds: None
- VOC Compliant: Yes

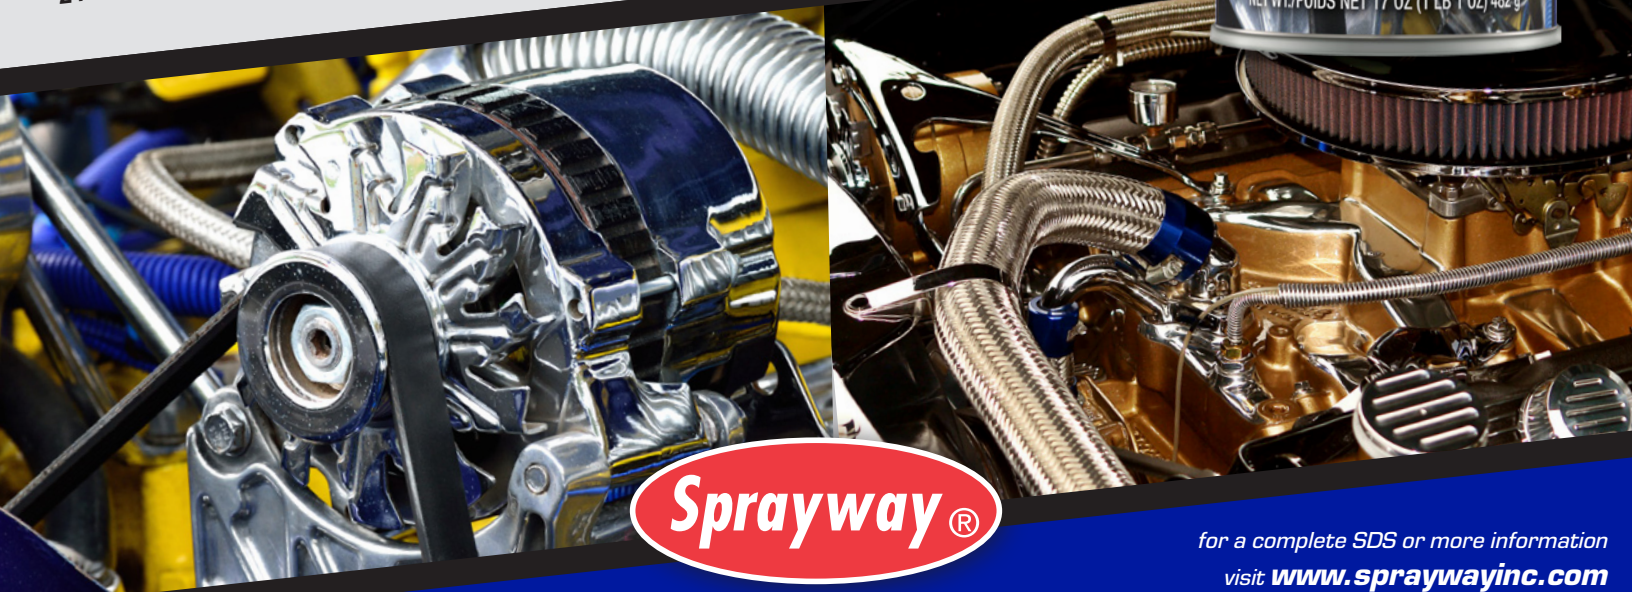

Used By The Pros Since 1947

for a complete SDS or more information
visit www.spraywayinc.com
800.332.9000 | Addison, Illinois 60101